
IEEE Task Force on

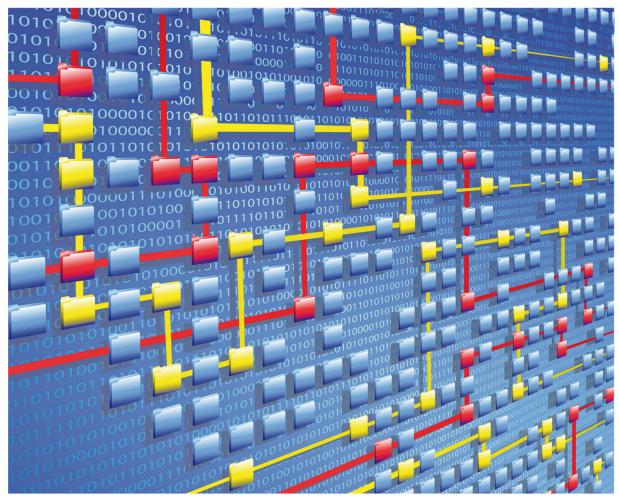

Process Mining

XES CERTIFICATION FOR PROM 6.7

TABLE OF CONTENTS

Contents

Tool	1
Meta	2
Import	3
Export	77
Contact Information	94

TOOL

Tool

NAME

ProM

VENDOR

Eindhoven University of Technology, Open Source

VERSION

6.7

REQUESTED CERTIFICATION LEVELS



META

Meta

AUTHORS

Eric Verbeek

DATE

06/09/2017

HISTORY


CHANGES		
AUTHOR(S)	DATE	DESCRIPTION
Eric Verbeek	06/09/2017	Added walk-throughs for all exports, using the imports.
Eric Verbeek	05/09/2017	Initial version, contains walk-throughs for all imports.


Import


REAL-LIFE LOGS

SANITIZED BPIC LOGS			
NAME	TRACES	EVENTS	SIZE IN KB
BPIC12	13,087	262,200	72,363
BPIC13_closed_problems	1,487	6,660	4,090
BPIC13_incidents	7,554	65,533	38,627
BPIC13_open_problems	819	2,351	1,370
BPIC15_1	1,199	52,217	40,261
BPIC15_2	832	44,354	33,616
BPIC15_3	1,409	59,681	45,673
BPIC15_4	1,053	47,293	36,131
BPIC15_5	1,156	59,083	44,961
BPIC17 - Offer log	42,995	193,849	107,557
BPIC17	31,509	1,202,267	565,373

BPIC12

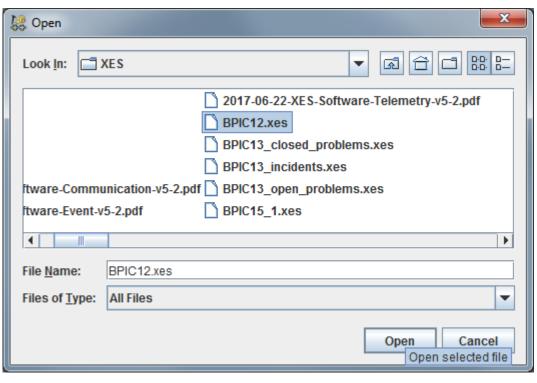



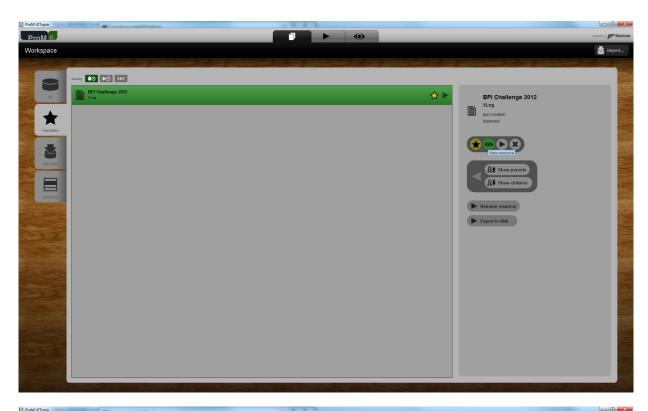



For the remainder of the real-life logs, only the last screenshot with the log dashboard will be shown. Mutatis mutandis, all other screenshots are similar, and only the last screenshot provides useful information on the imported log.

BPIC13_closed_problems





BPIC13_incidents





BPIC13_open_problems




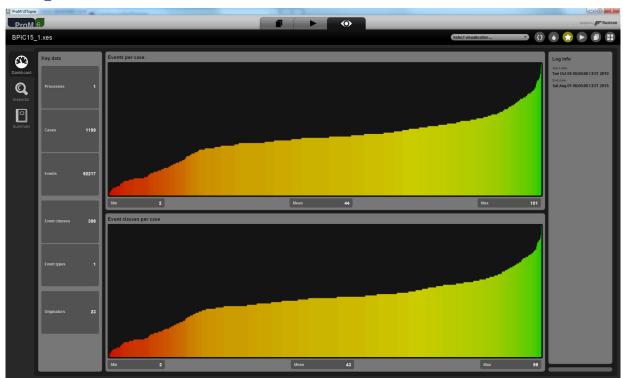

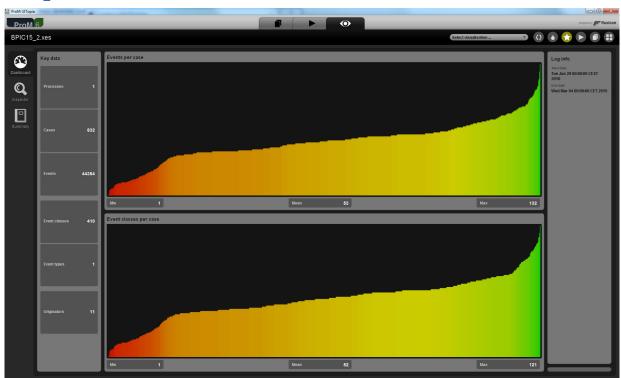

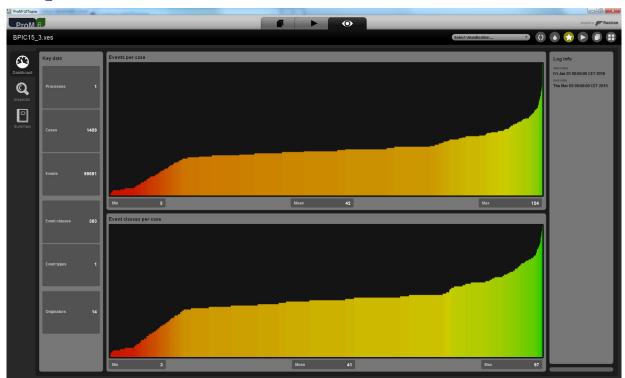

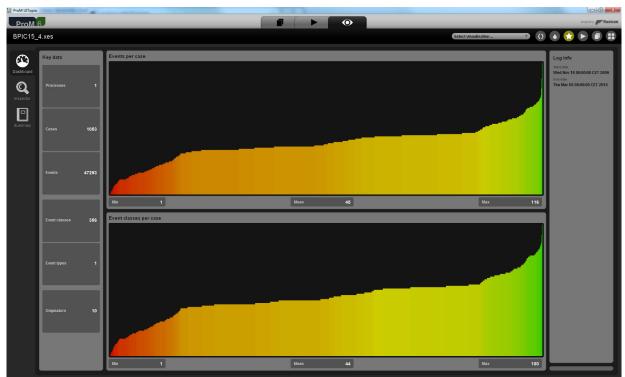


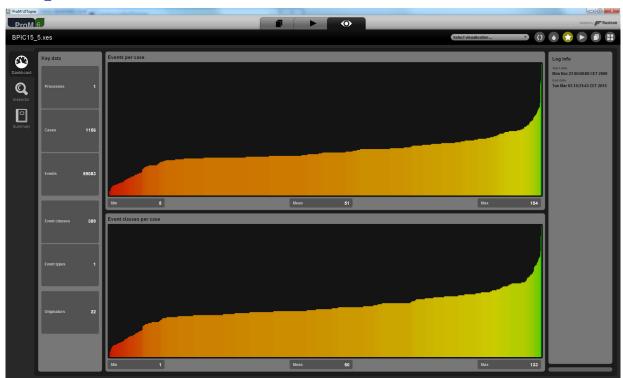

BPIC17 – Offer log



BPIC17

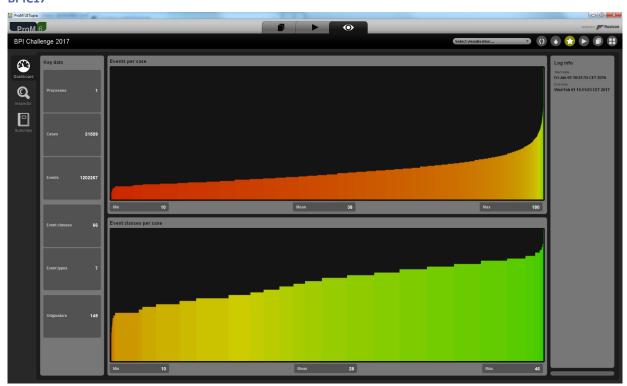

ARTIFICIAL LOGS

FILTERED REPAIR	REXAMPLE LOGS	
NAME	LEVEL	EVENT ATTRIBUTE KEYS (IF BOLD THEN GLOBAL)
LevelA1	A1	concept:name
LevelA2	A2	Classifier (concept:name AND lifecycle:transition)
LevelB1	B1	concept:name, lifecycle:transition, time:timestamp
LevelB2	B2	Classifier (concept:name AND lifecycle:transition), time:timestamp
LevelC1	C1	concept:name, org:resource
LevelC2	C2	Classifier (concept:name AND lifecycle:transition), org:resource
LevelD1	D1	concept:name, concept:instance,

		lifecycle:transition, org:resource, org:group, org:role, time:timestamp
LevelD2	D2	Classifier (concept:name AND lifecycle:transition), concept:instance, org:resource, org:group, org:role, time:timestamp
FlagX1	X1	defectFixed, defectType, Key 1, Key 2, Key 3, Key 4, Key 6, phoneType, numberRepairs, {0,1,2} 2Sa!! +1 <x>, ITEMS:41, #1, o.1.1</x>
FlagX2	X2	defectFixed, defectType, Classifier (Key 1 AND Key 6), Key 2, Key 3 , Key 4 , phoneType, numberRepairs, {0,1,2} 2Sa!! +1 <x>, ITEMS:41, #1, o.1.1</x>

KEYS	TYPE	VALUES
concept:instance Key 2	string	instance 1 instance 2 instance 3 instance 4
concept:name (A1 and C1 logs)	string	Analyze Defect+complete Analyze Defect+start Archive Repair+complete Inform User+complete Register+complete Repair (Complex)+complete

ATTRIBUTE TYPES AND VALUES


		Repair (Complex)+start Repair (Simple)+complete Repair (Simple)+start Restart Repair+complete Test Repair+complete Test Repair+start
concept:name (other logs) Key 1	string	Analyze Defect Archive Repair Inform User Register Repair (Simple) Repair (Complex) Restart Repair Test Repair
lifecycle:transition Key 6	string	start complete
org:group {0,1,2} 2Sa!! +1 <x></x>	string	Group - Group 1, 3, and 5 Group 2 and 4
org:resource Key 3	string	SolverC1 SolverC2 SolverC3 SolverS1 SolverS2 SolverS3 System Tester1 Tester2 Tester3 Tester4 Tester5 Tester6
org:role ITEMS:41, #1, o.1.1	string	Role 1, 2, and 3 Role 10 Role 9
time:timestamp Key 4	date	Like 1970-01-02T12:23:56.720+01:00
defectFixed	boolean	true false
defectType	int	1 10 2 3 4 5 6 7


		8 9
numberRepairs	int	0 1 2 3
phoneType	String	T1 T2 T3


Level A1





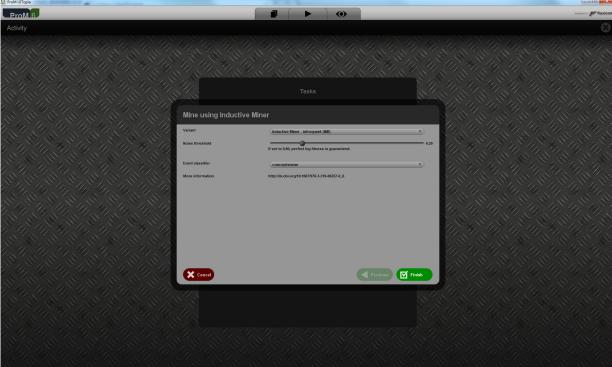

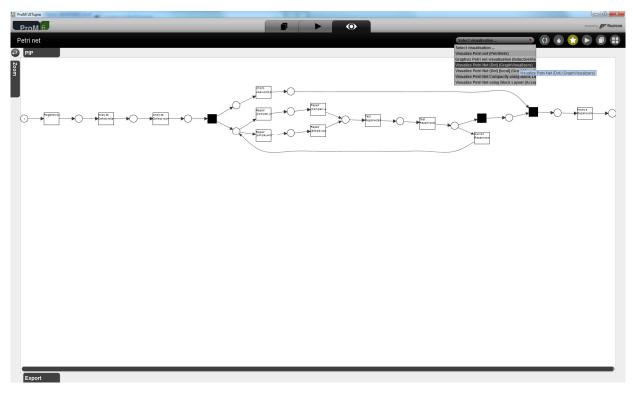

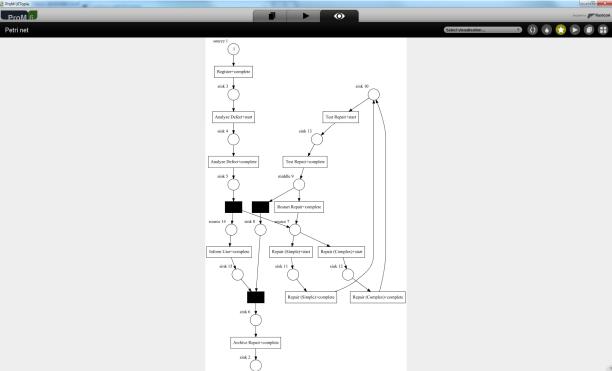



This clearly shows the correct activity names.


Level A2





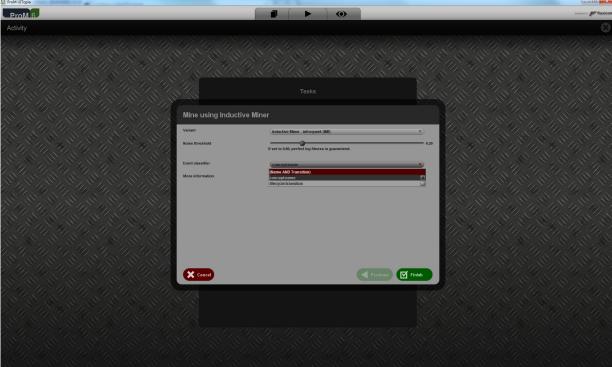

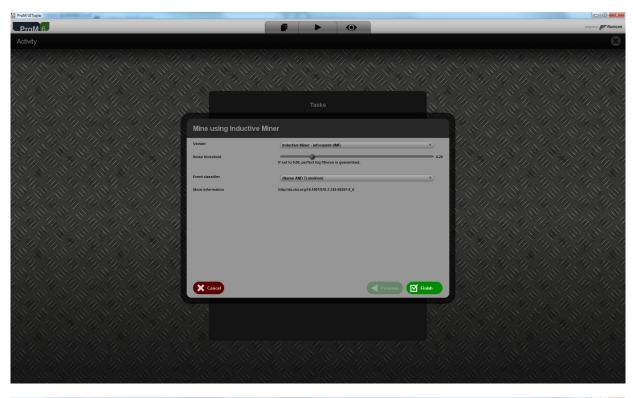

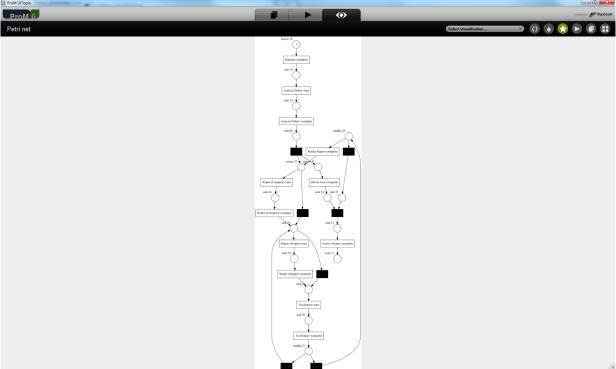



This clearly shows the correct combinations of concept names and lifecycle transitions (as defined by the classifier (Name AND Transition)) as activity names.


Level B1





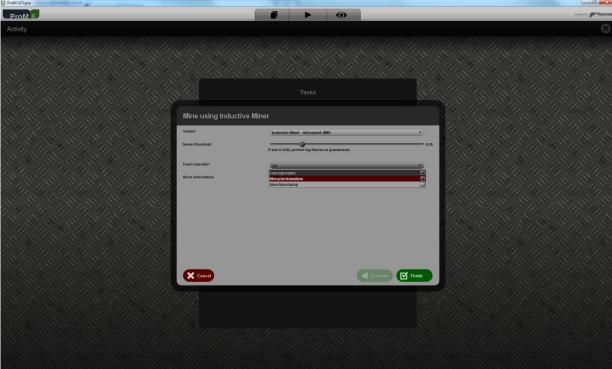

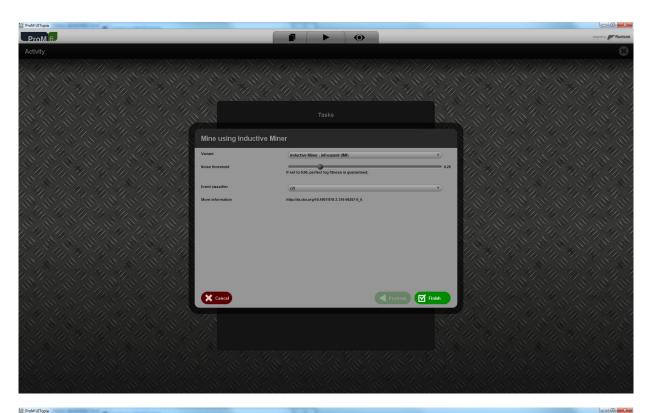

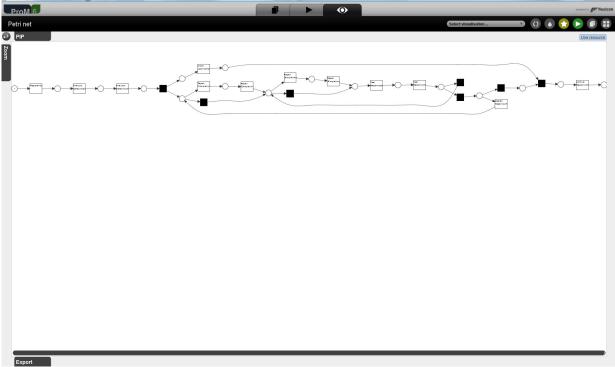













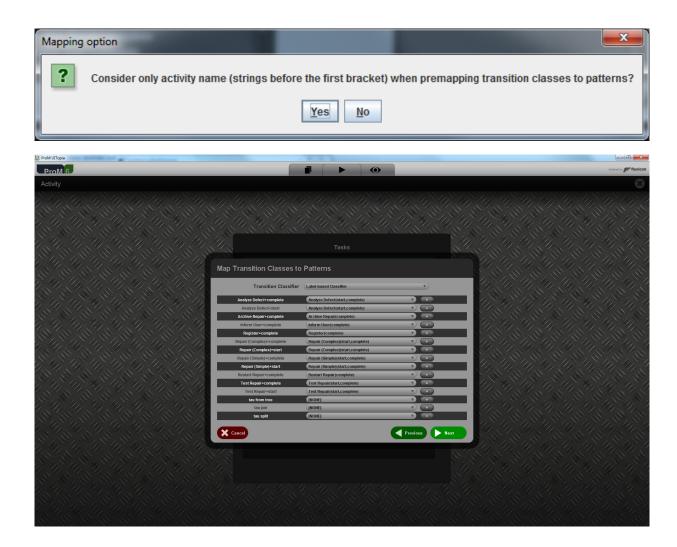


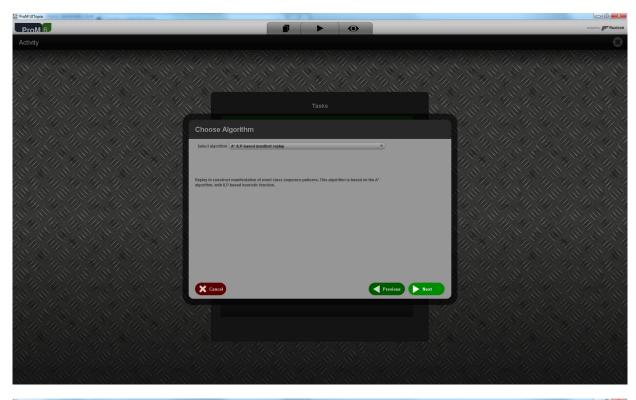

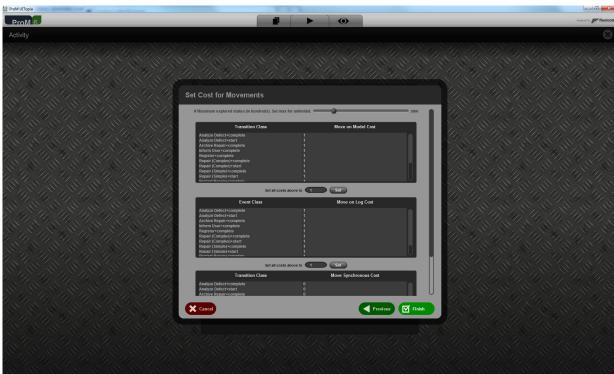

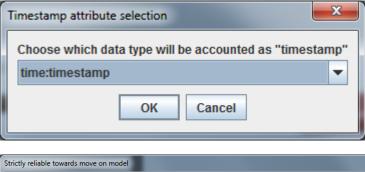



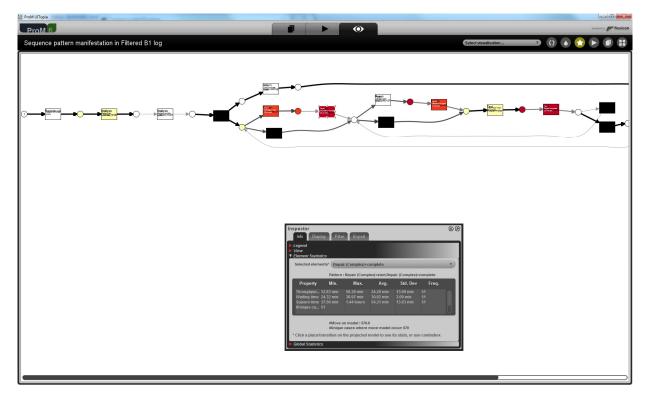



This shows that the three attributes are taken into account.


Level B2





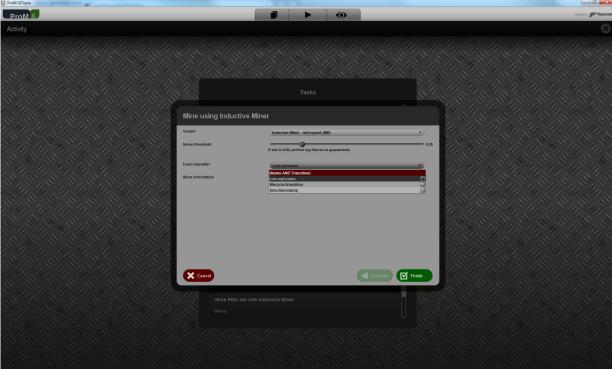

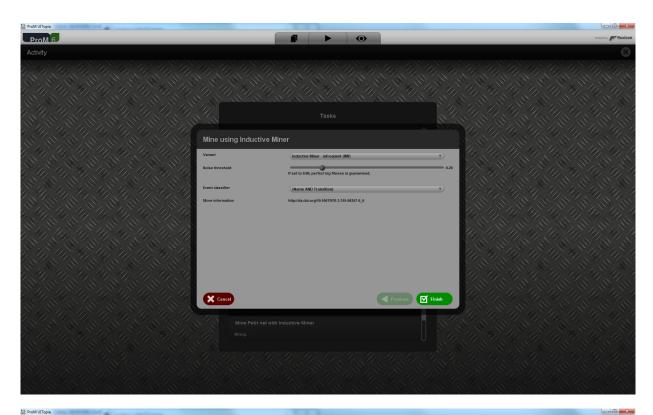

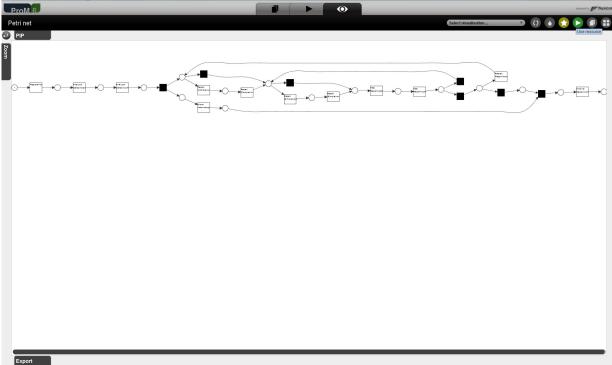


















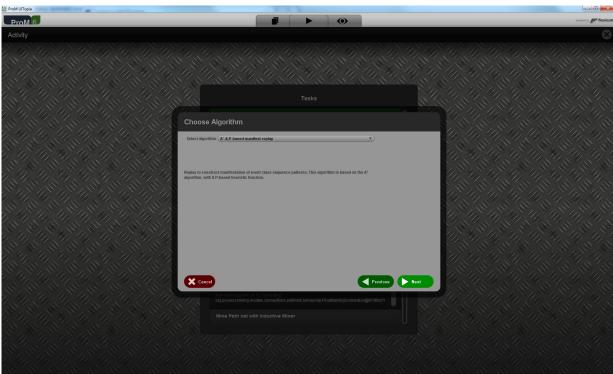







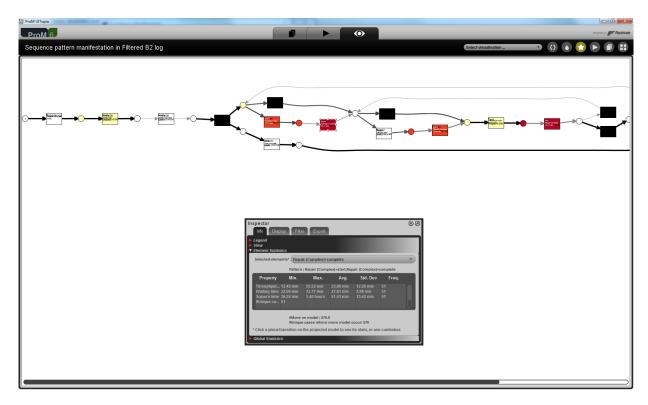



This shows that the classifier and the time: timestamp attributes contained in the \log were used.


Level C1






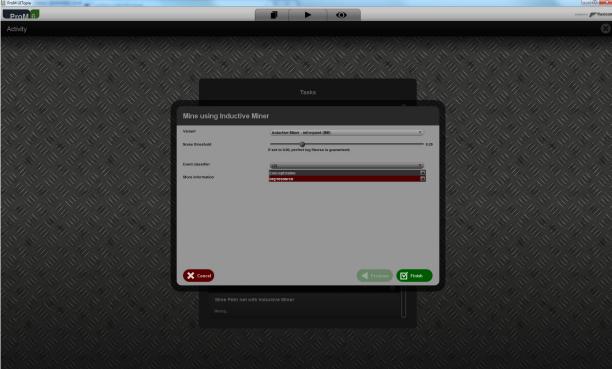

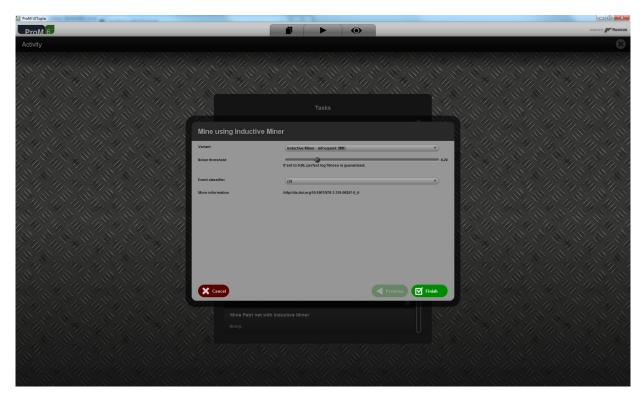

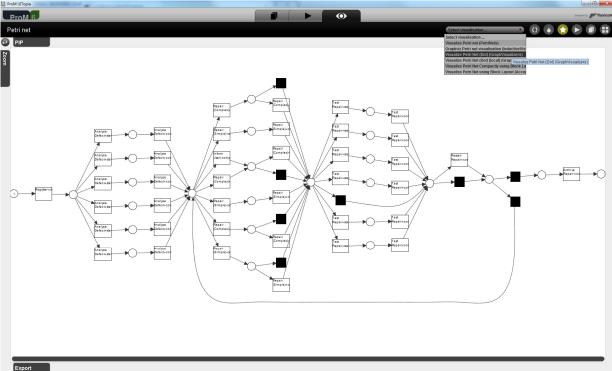

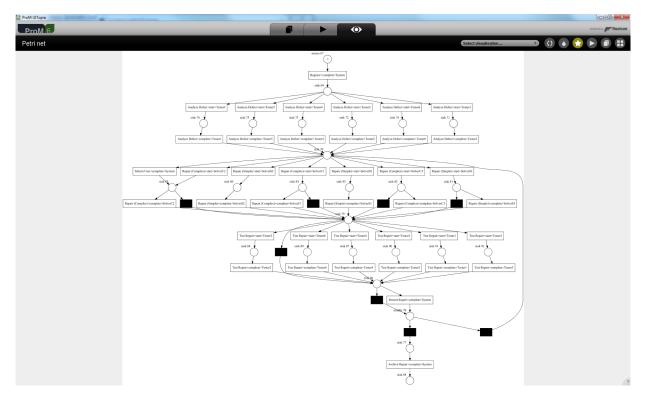



This shows that the concept:name and org:resource attributes contained in the log were used.


Level C2







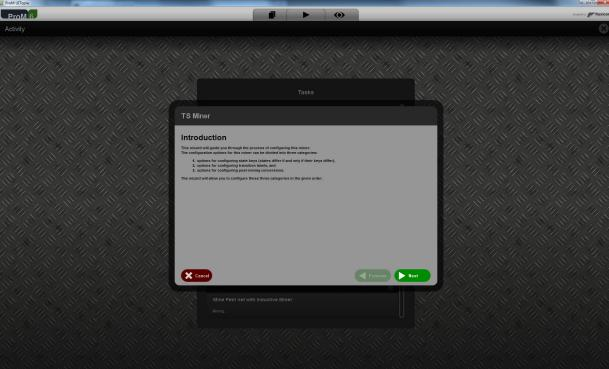


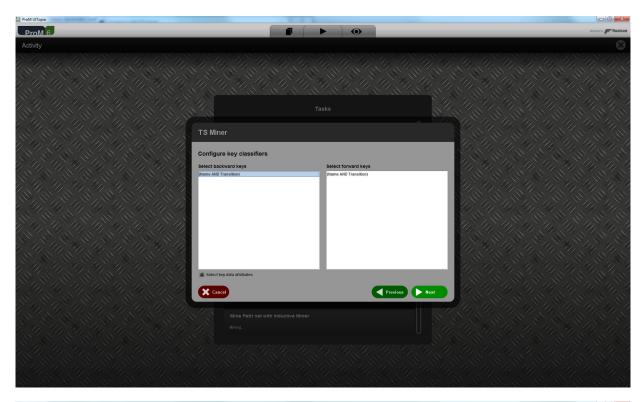


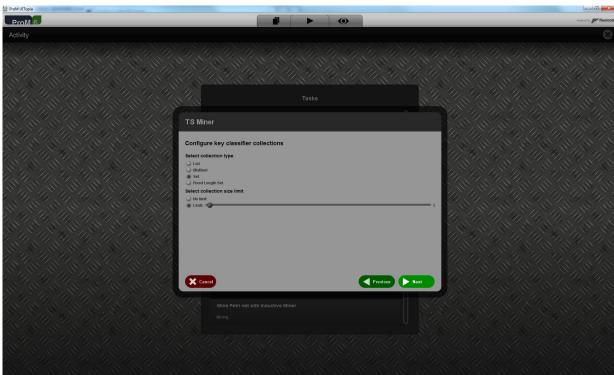


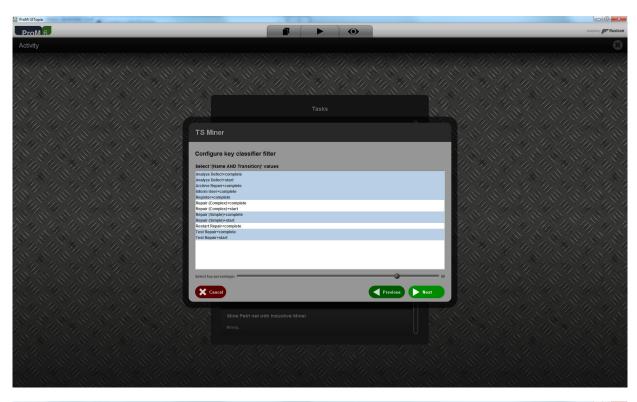


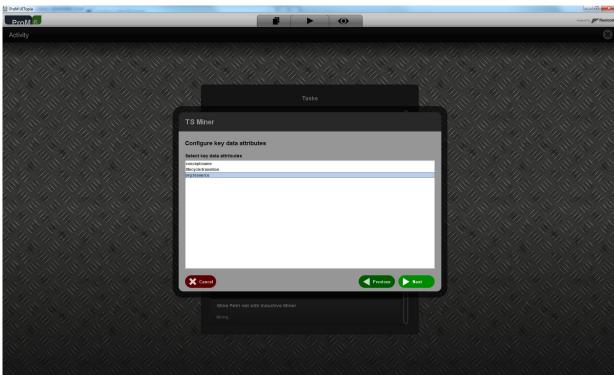

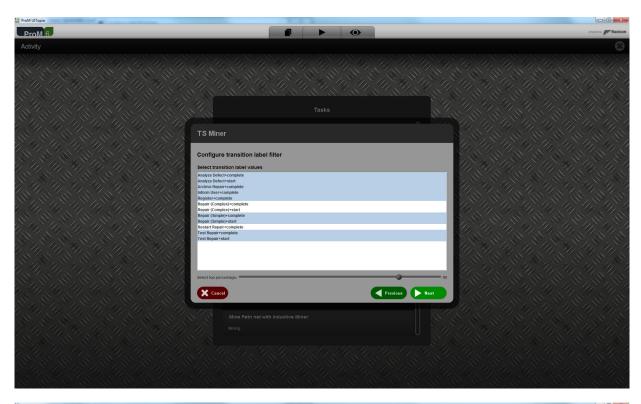

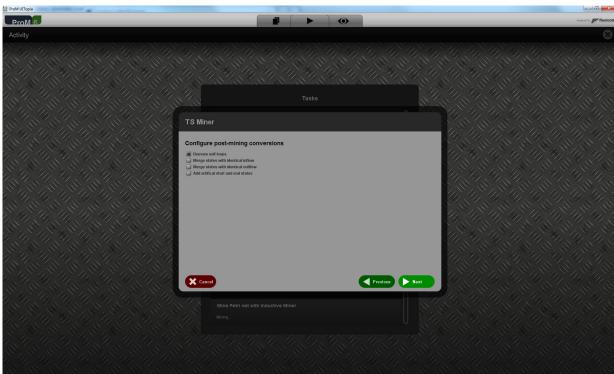

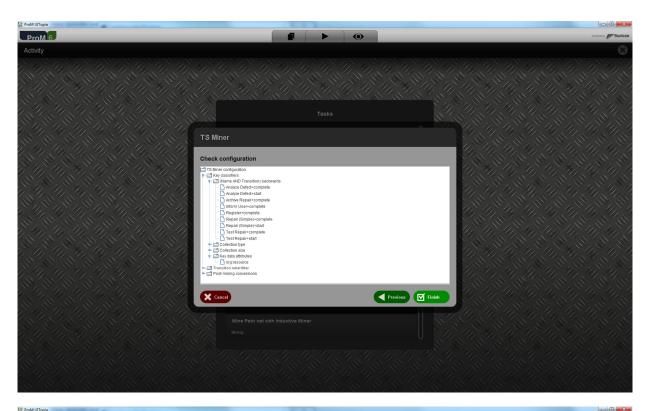

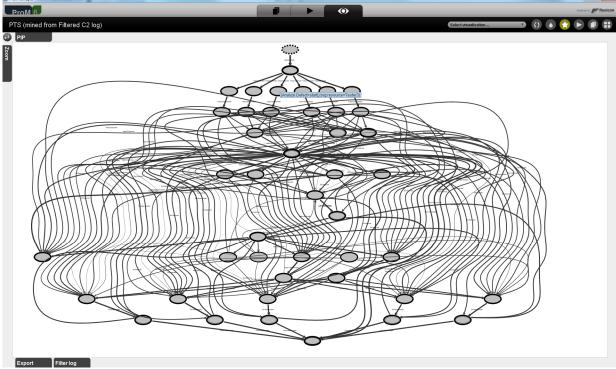


This shows that the classifier and the org:resource attributes contained in the log were used.


Level D1






This plug-in shows all possible values found in the log for an attribute key, and allows the user to filter the log on these values. In this report, we will use this plug-in to show that the proper values have been read by filtering in only a single event from the trace with name 1.

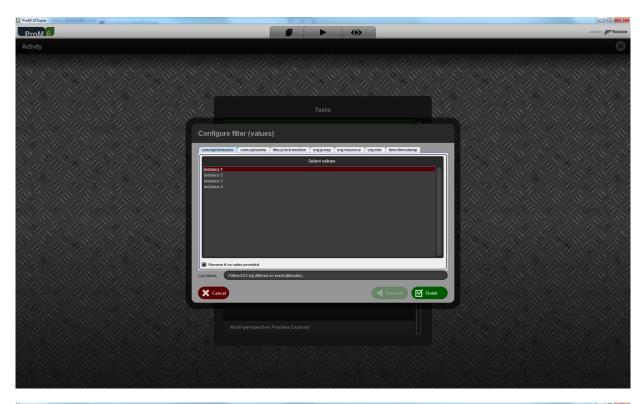


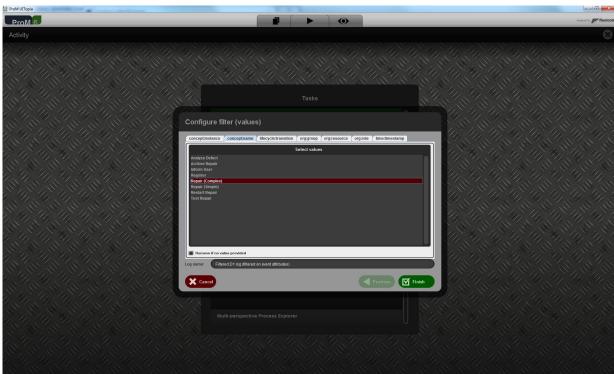




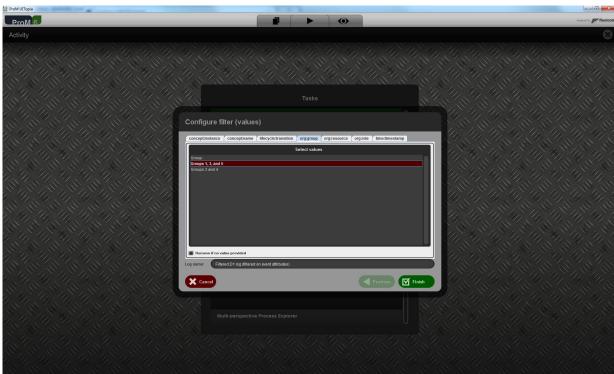




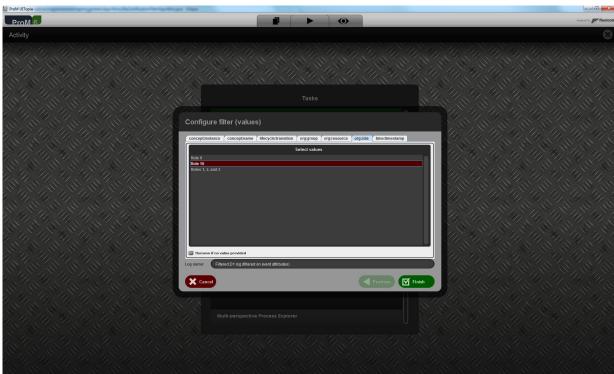



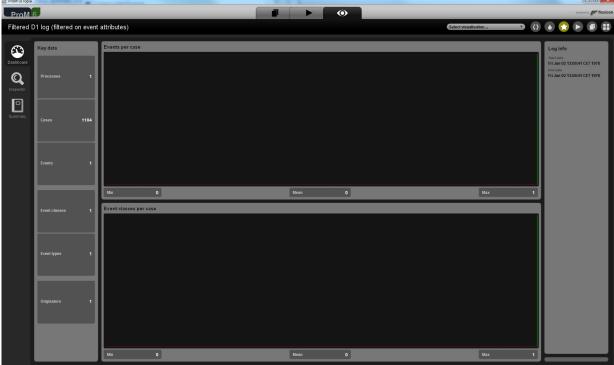

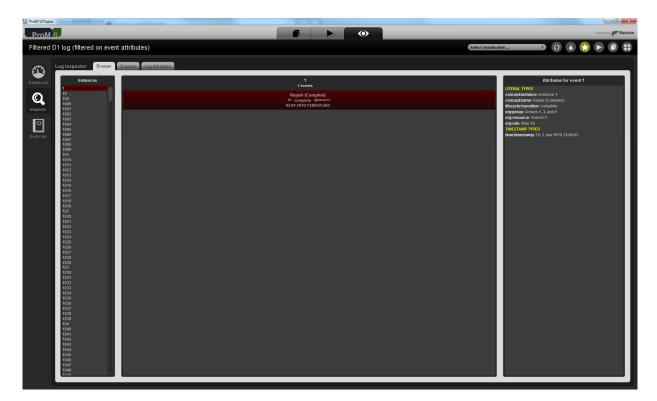


This shows that all (standard) attributes contained in the \log were used.

Level D2





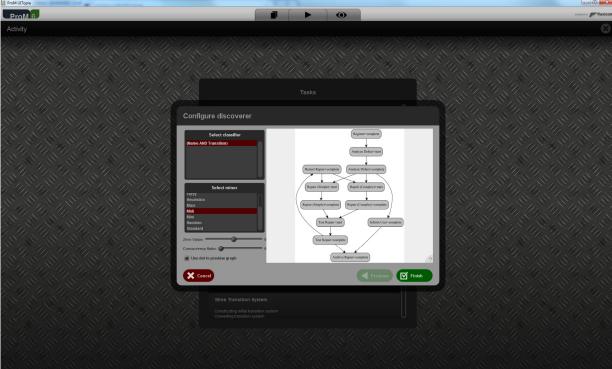


This shows that the classifier and the classified attributes contained in the log were used. To show that all standard attributes were used, we use the same filter as before.












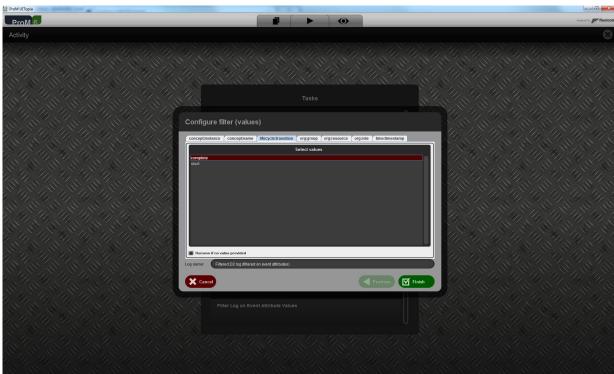




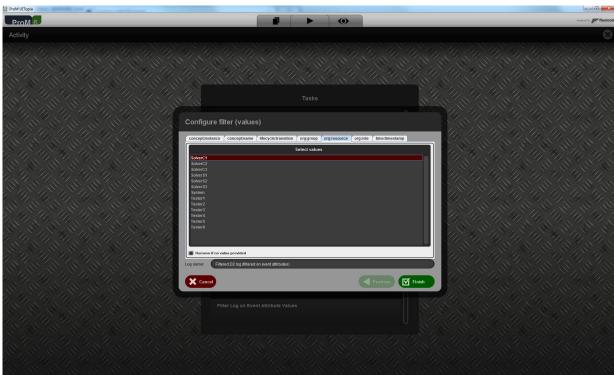

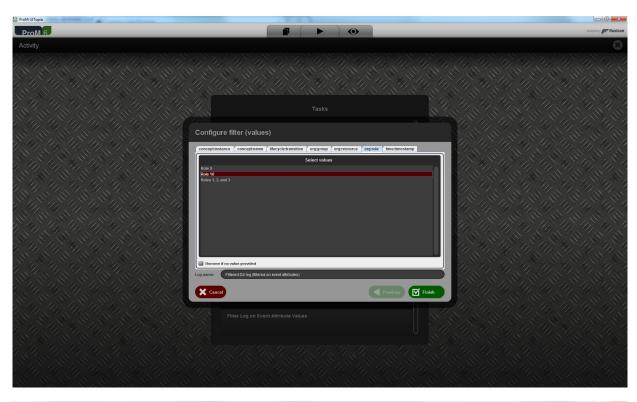


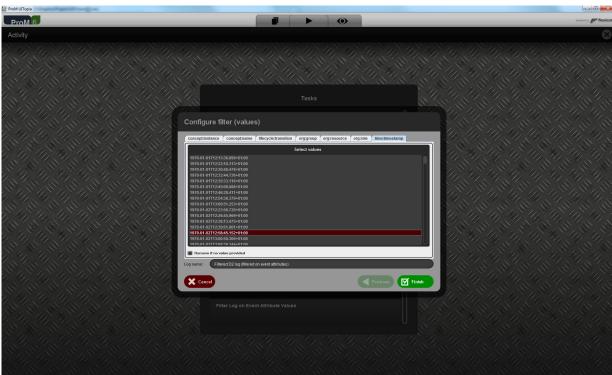

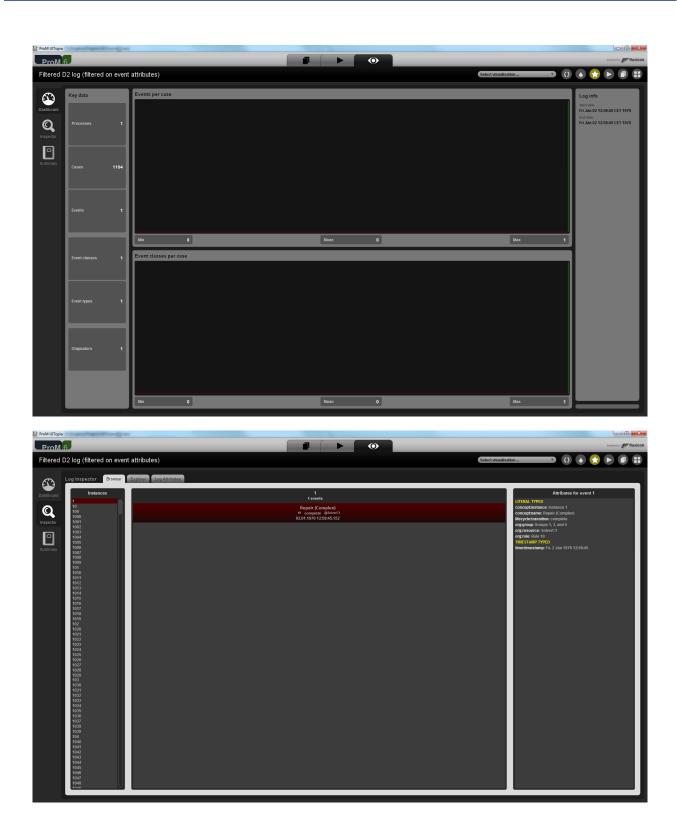



This shows that the classifier and all (standard) attributes contained in the log were used.


Flag X1

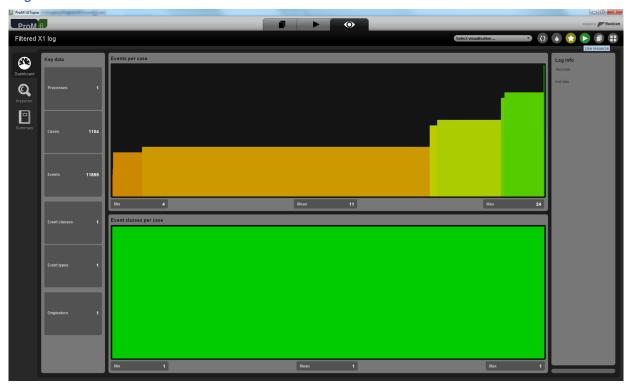





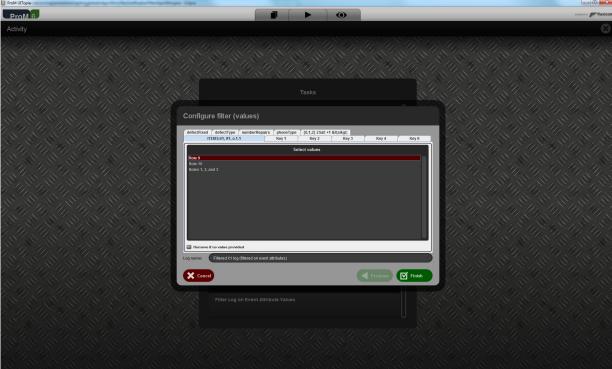

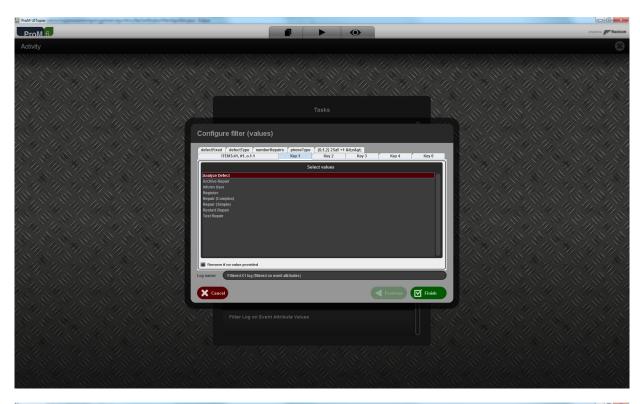


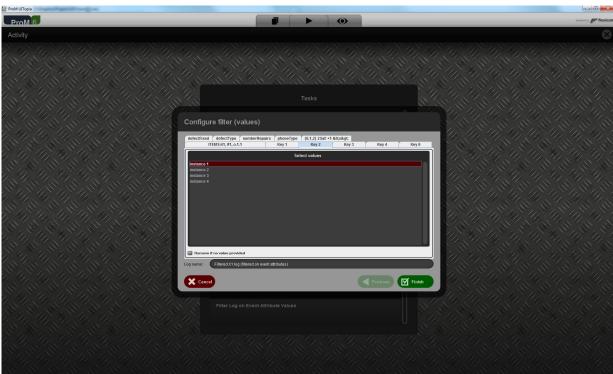


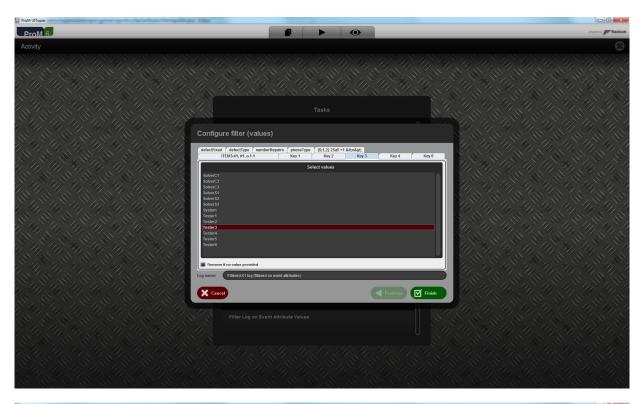


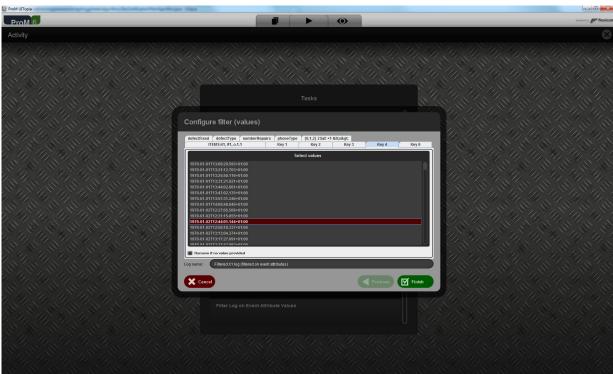





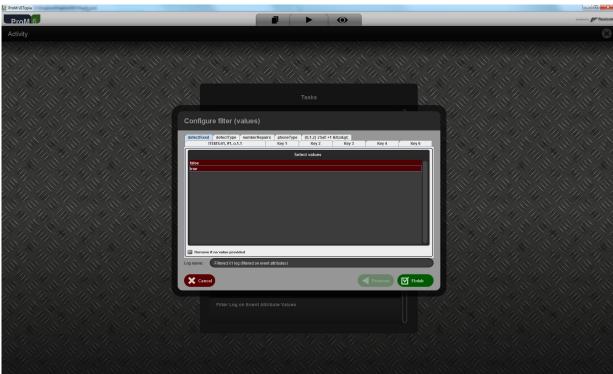


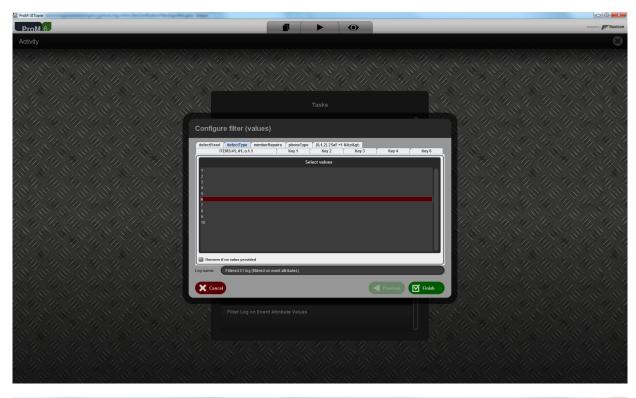

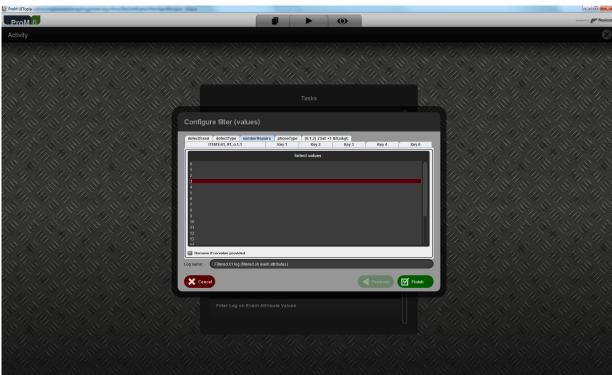

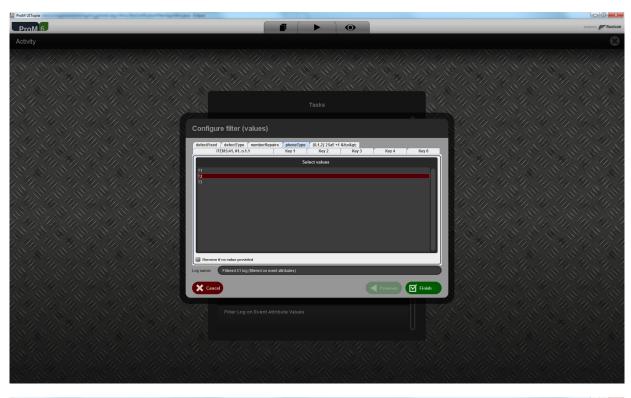


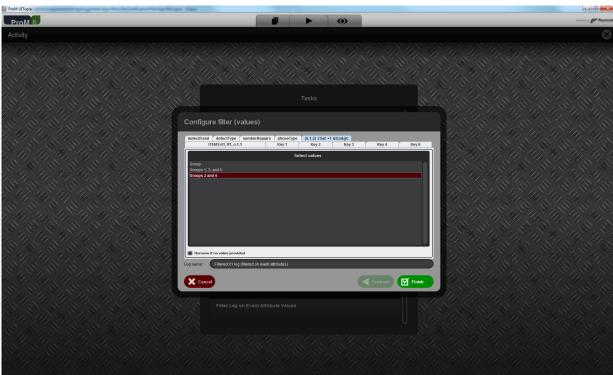


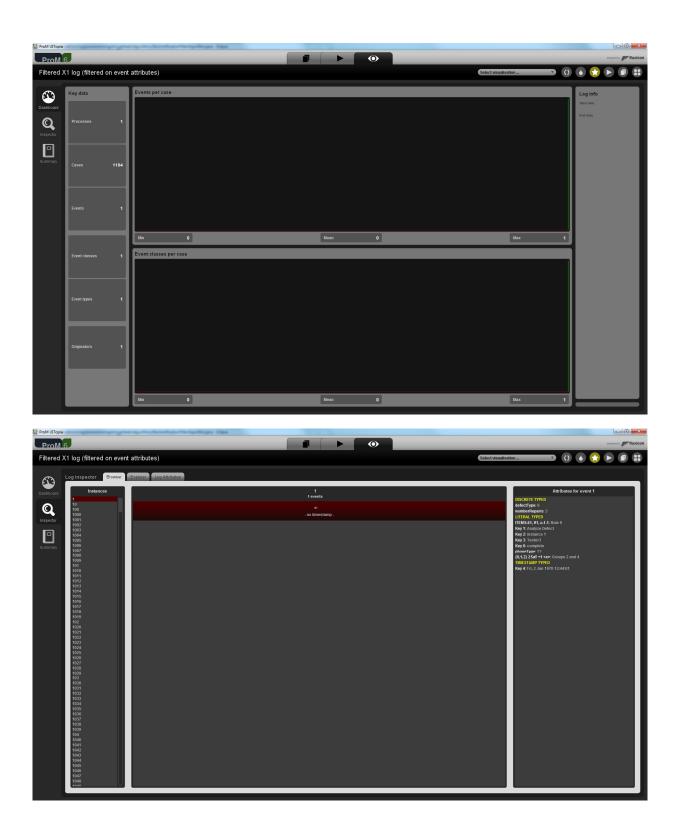



This shows that all (non-standard) attributes contained in the log were used.

Flag X2

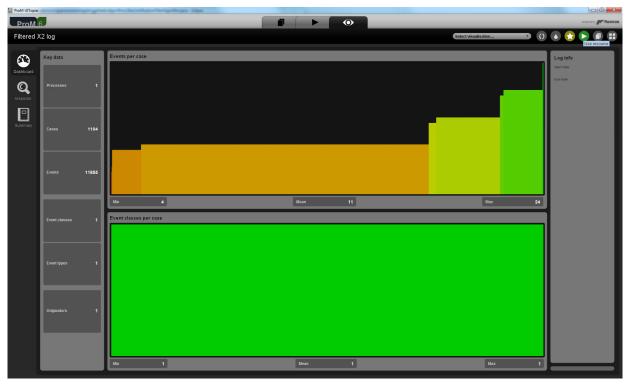

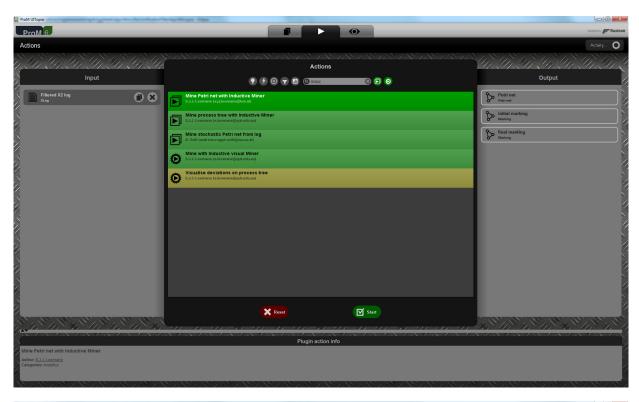

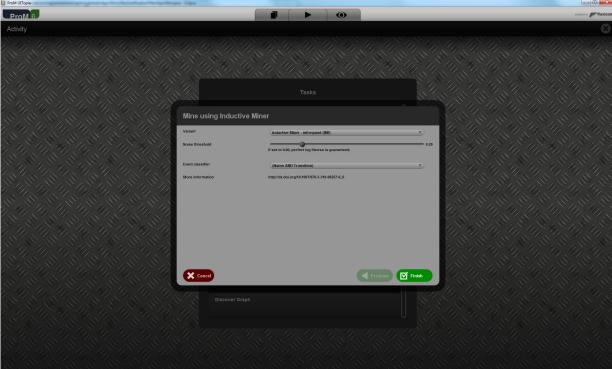

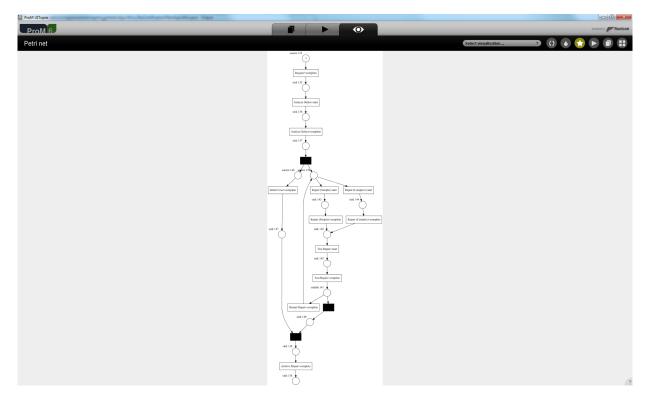

This shows that the classifier and classified attributes (Key 1 AND Key 6) contained in the log were used.


To show that all other attributes can also be used, we can again use the log filter.


This shows that the classifier and all (non-standard) attributes contained in the log were used.


Export


Now we know that the import is working on all levels, we can use it to test the export. We do this by first importing the log for the given level, export that log to a file, import the log from that file again, and show that the result are the same as with the import as shown in the previous section. For sake of brevity, we only show the final screenshot, and only show the import-export-import sequence for the first (A1) log.


Level A1

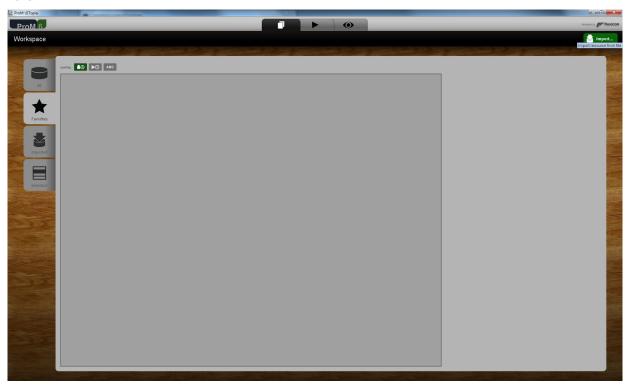


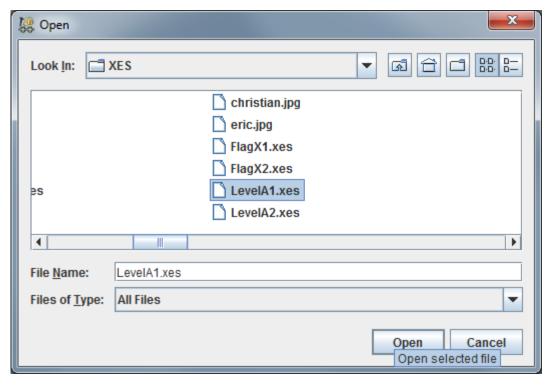

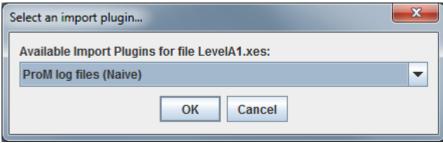


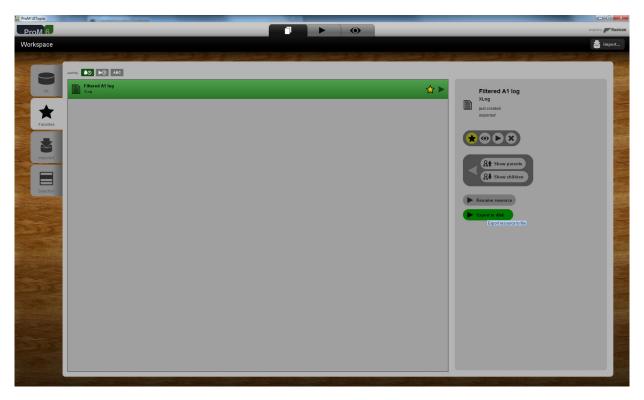


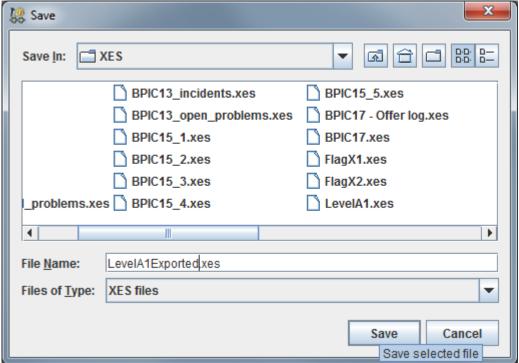


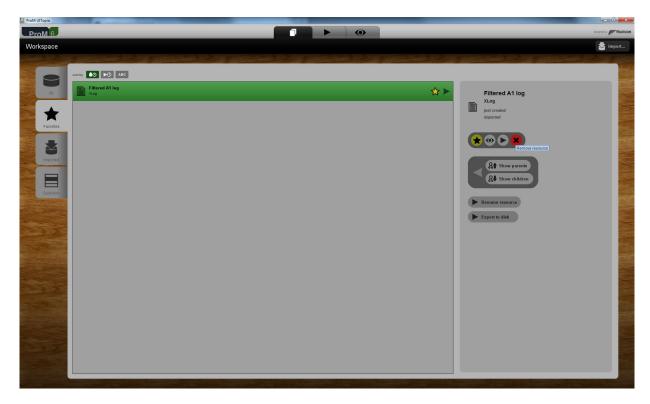



Remove the imported \log to make sure we cannot use it in the next steps.

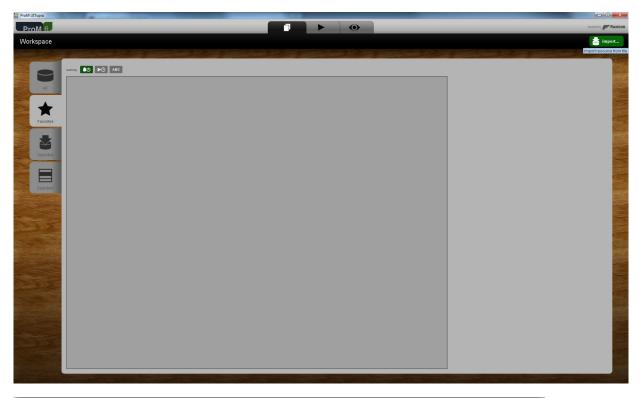

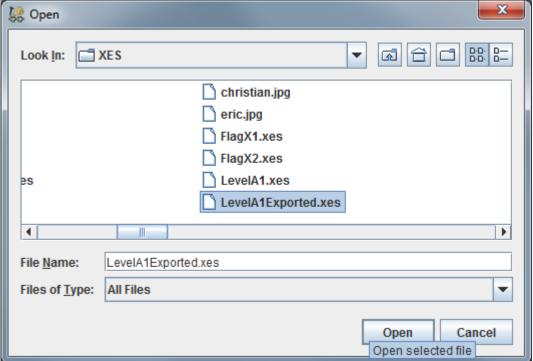

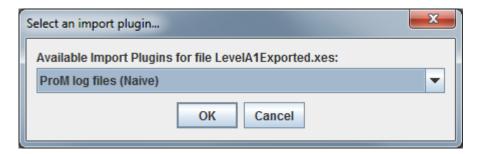

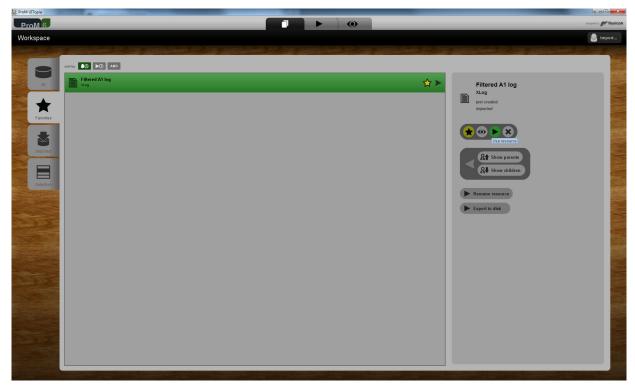


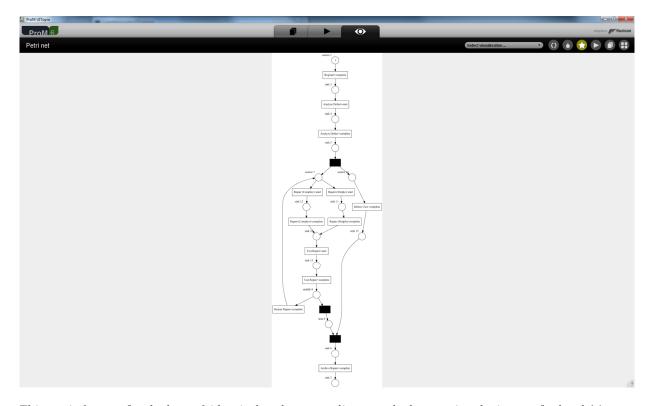

This net is (except for the layout) identical to the net as discovered when testing the import for level A1.

This shows that the current data as stored by the tool is exported successfully to a log, and that the concept:name attributes as contained in the log match the current data as stored by the tool


Level A2

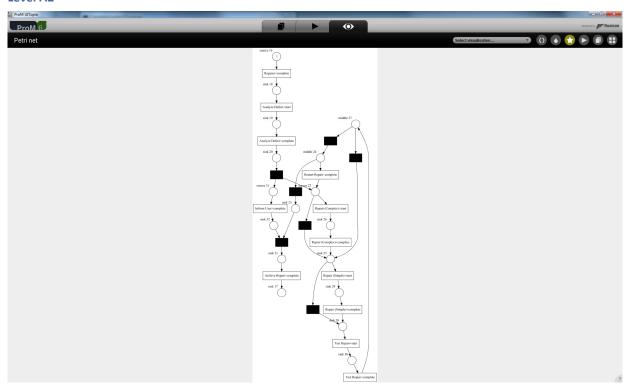

This net is (except for the layout) identical to the net as discovered when testing the import for level A1.

This shows that the current data as stored by the tool is exported successfully to a log, and that the classifier as contained in the log matches the current data as stored by the tool


Level B1

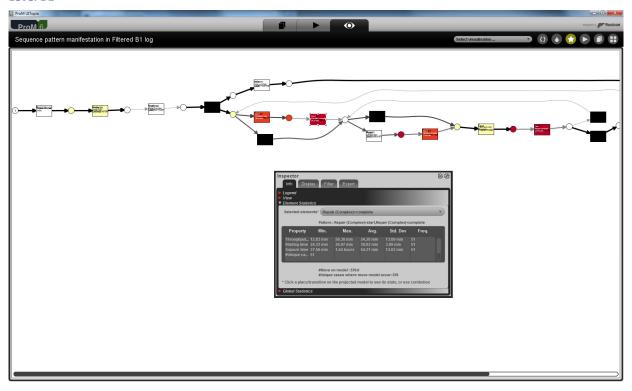

The same (except for the layout of the net) results as with the imported log.

This shows that the current data as stored by the tool is exported successfully to a log, and that the concept:name, lifecycle:transition, and time:timestamp attributes as contained in the log match the current data as stored by the tool


Level B2

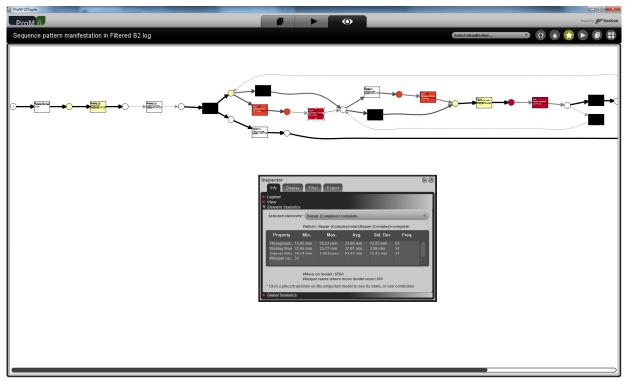

The same (except for the layout of the net) results as with the imported log.

This shows that the current data as stored by the tool is exported successfully to a log, and that the classifier and the (lifecycle:transition and) time:timestamp attributes as contained in the log matches the current data as stored by the tool


Level C1

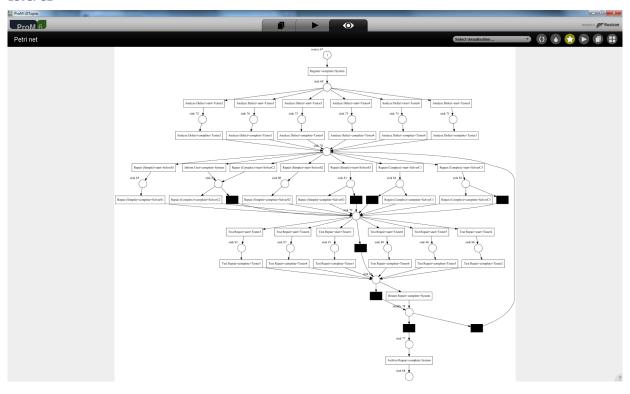

The same (except for the layout of the net) results as with the imported log.

This shows that the current data as stored by the tool is exported successfully to a log, and that the concept:name and org:resource attributes as contained in the log match the current data as stored by the tool


Level C2

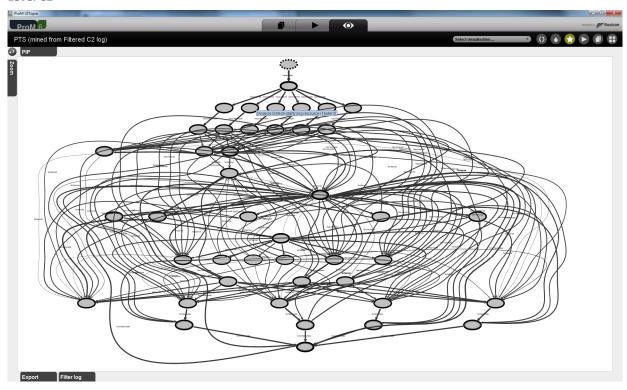

The same (except for the layout of the transition system) results as with the imported log.

This shows that the current data as stored by the tool is exported successfully to a log, and that the classifier and the org:resource attributes as contained in the log matches the current data as stored by the tool


Level D1

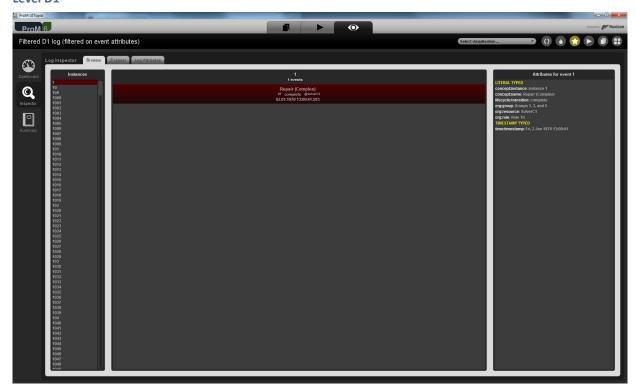

The same results as with the imported log.

This shows that the current data as stored by the tool is exported successfully to a log, and that all standard attributes as contained in the log match the current data as stored by the tool

Level D2

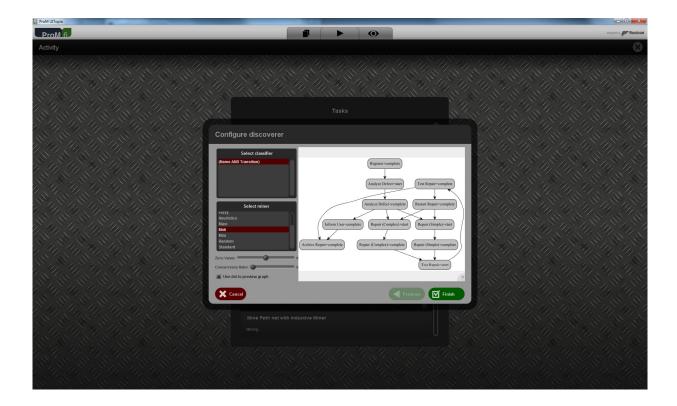




The same results (except for layout) as with the imported log.

This shows that the current data as stored by the tool is exported successfully to a log, and that the classifier and all standard attributes as contained in the log matches the current data as stored by the tool


Flag X1

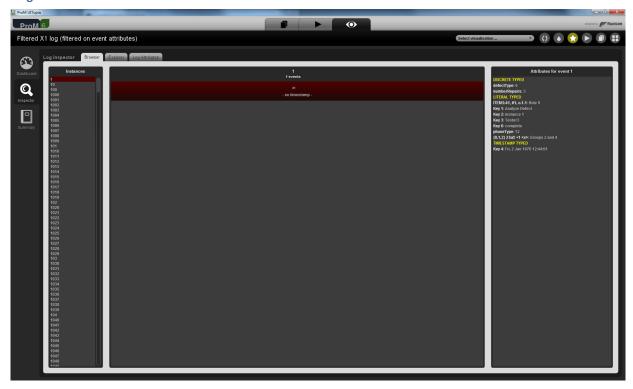

The same results as with the imported log.

This shows that the current data as stored by the tool is exported successfully to a log, and that all (standard or non-standard) attributes as contained in the log match the current data as stored by the tool

Flag X2

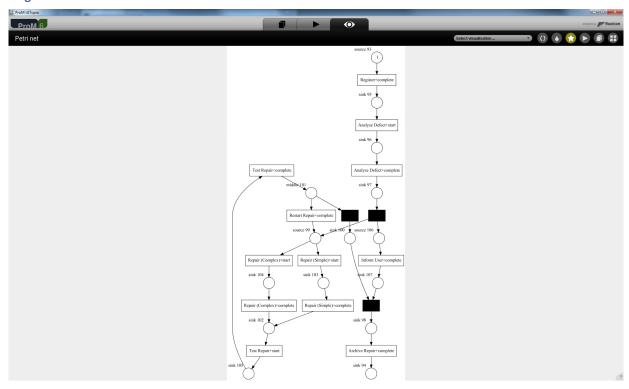

This shows that the classifier and classified attributes (Key 1 AND Key 6) contained in the log were exported correctly.

To show that all other attributes are also exported correctly, we can again use the log filter.

This shows that the current data as stored by the tool is exported successfully to a log, and that the classifier and all (standard or non-standard) attributes as contained in the log matches the current data as stored by the tool

CONTACT INFORMATION

Contact Information

WIL VAN DER AALST CHAIR



Tel +31 40 247 4295 w.m.p.v.d.aalst@tue.nl

CHRISTIAN GÜNTHER VICE-CHAIR



Tel +31 64 1780680 christian@fluxicon.com

ERIC VERBEEK SECRETARY



Tel +31 40 247 3755 h.m.w.verbeek@tue.nl

IEEE XES Working Group
IEEE Task Force on Process Mining
http://www.win.tue.nl/ieeetfpm



Process Mining